Bow Hatch Gasket Installation Instruction

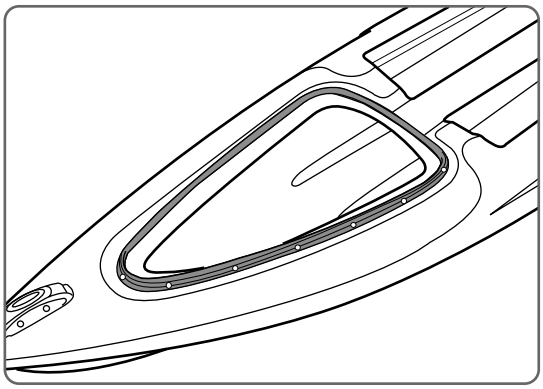

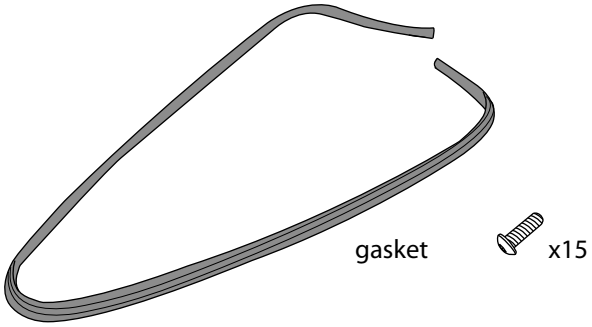

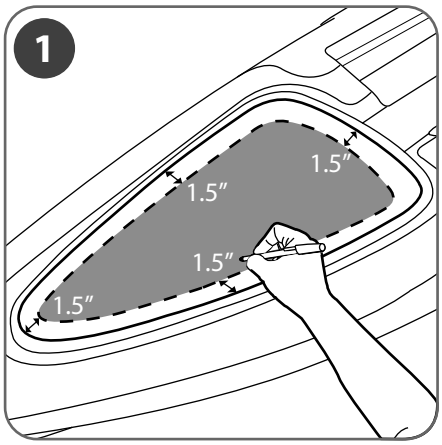

Mark the cutting line on the front hatch, make sure the line is 1.5″ away from the edge of the front hatch area.

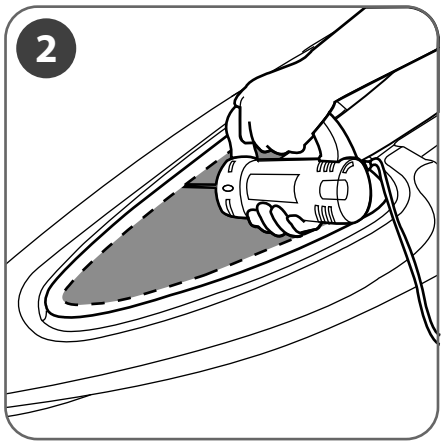

Use jigsaw or rotozip to cut the hatch by following the cutting line.

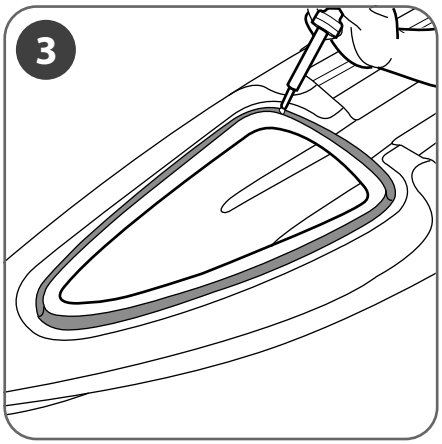

Use heat gun to heat up around the grey area as shown in the picture.

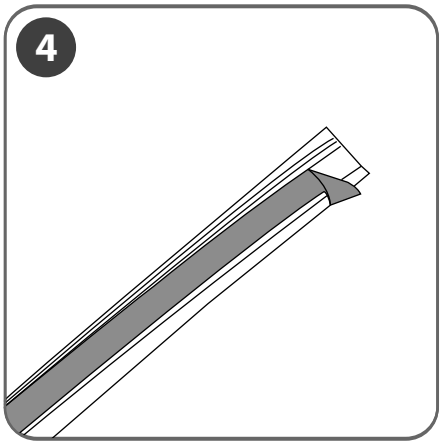

Peel off the sticker paper on the gasket.

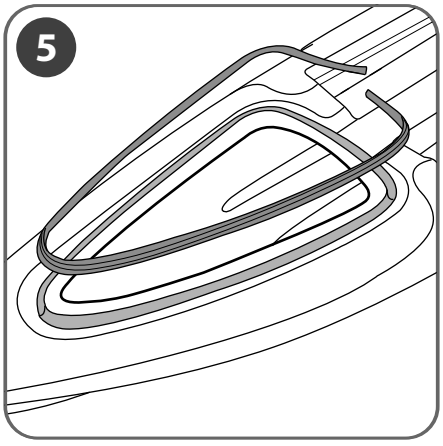

Attach the gasket around the heated area.

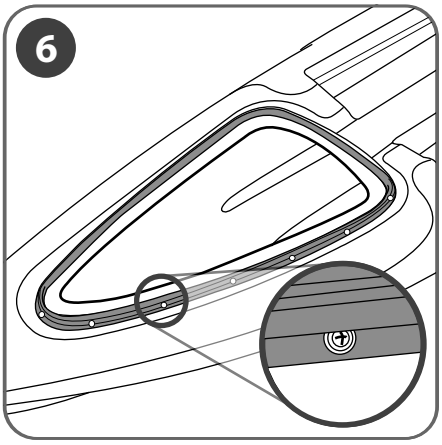

Once the gasket in the proper position, fasten it with screws.